




Datasheet Server Lite

Basic central control unit, where automation begins

Technical data

Power supply	24 VDC
Max. power consumption	<10 W
Interfaces	2x STARS interface (up to 1024 STARS devices each)
	1x 1 Gb Ethernet
Temperature	Operating: +5 °C ... +45 °C
	Storing: -15 °C ... +50 °C
Weight	243 g
Size (DIN)	4 units
Dimensions (W/H/D)	70 mm/107 mm/61 mm
Mounting type	Din rail 35 mm
Safety Rating	IP20

Wirings

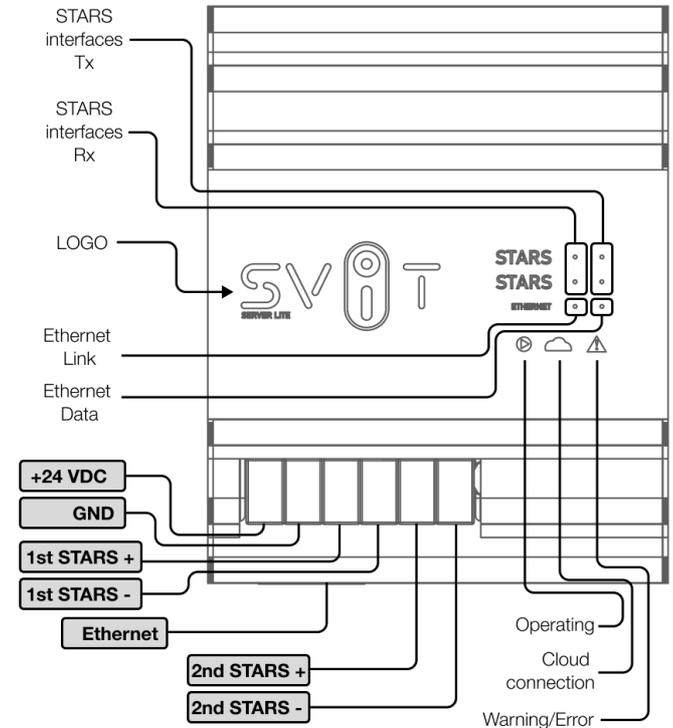

Warnings



Before proceeding with the assembly, read instructions and schematics available at www.svit.io. Power supply, loads, other connectable stuff have to be in accordance with device specifications. Manufacture is not responsible for any damage caused by equipment, not connected in a proper way. In case of any questions, please, contact with support team at: www.svit.io/support

Cautionary statements



- Danger, caused by electric current
- Incorrect connections can cause an electric shock or fire
- All electric works can be done only appropriate qualified person
- During any works with device, make sure, that supply power is disconnected from the circuit

Manufacture information

NSA I.t.d
Syretska 28 str.
03128 Kyiv, Ukraine (UKR)

Warranty

Warranty information available at
<https://svit.io/warranty>